

## FLATWORK IRONERS FOR BIG PRODUCTIONS

### HIGH CAPACITY FLATWORK IRONERS WITH LENGTH/CROSS FOLDER AND STACKER

#### Features

#### CTP-260-330/60

- Flatwork ironers, with front feed and return.
- Roll sizes: 2.600 and 3.300 mm long and diameter 600 mm.
- Panels in painted steel.
- **One or two working lanes:** one lane for bedsheets and two lanes for tablecloth and smaller pieces.
- **Length fold** (1 or 2 folds) and **crossfold** (up to 3 folds).
- Folding system by photocells and compressed air.
- Two types of linen stacker, with possibility to program the number of items stacked. The stacker can be positioned on either side of the machine.
- Polished steel roll, with finger guard.
- CE certificate and gas certifications.
- Frequency control.
- Feeding and ironing belts are Nomex.
- Touch-screen control: programs can be created with speed control (between 3 and 18 mts/min), temperature and folding parameters.
- Big output capacity, depending on the residual moisture of the linen, up to 140 kg/hour directly from the high spin washer extractor.
- Powerful exhaust system.
- Electric, gas or steam heating.



Emissions  
CO<sub>2</sub>/carbon  
footprint



Energy  
efficiency



Touch  
technology



Microprocessor



Inverter



Chromed roll



Easy  
maintenance



Drying



Ironing



Length fold



Cross fold





Stacking

#### Options

- Automatic 1 lane clamp feeder with vacuum feeding belts.
- Small pieces back collector: 2 or 4 lanes + By-Pass.
- Vacuum feeding belts.
- Partial by pass, so different programs can be used in each of the 2 working lanes.
- Linen reject system.
- Double air pressure in length folds for thicker linen.
- Stacker- 1 or 2 lanes.
- Compact (roll-off) stacker- only in 1 lane models.
- Special voltage.

TECHNICAL DATA	UNIT.	CTP-260/60	CTP-330/60
<b>GENERAL DETAILS</b>			
Theoretical production (45%) humidity	Kg/h	75-105	110-140
Ø Roll	mm	600	600
Working width	mm	2.600	3.300
Height floor-feeding	mm	1.100	1.100
Working speed	mt/min	3-10	3-10
Control type	-	Touch	Touch
Programmes	Nº	20	20
Side stacker	Nº	Yes	Yes
<b>FOLDING</b>			
1 lane- Primary fold	Nº	1-2	1-2
1 lane- Cross fold	Nº	1-2-3	1-2-3
2 lanes- Primary fold	Nº	1-2	1-2
2 lanes- Cross fold	Nº	1-2	1-2
<b>POWER</b>			
Heating power (electric model)	kW	60	60
Total electric power (electric model)	kW	63,1	63,1
Heating power (gas model)	kW	65	82
Total electric power (gas model)	kW	3,1	3,1
Heating power (steam model)	kW	55	75
Total electric power (steam model)	kW	3,1	3,1
<b>CONNECTIONS</b>			
Ø Gas inlet	BSP	1"	1"
Ø Steam inlet	BSP	1"	1"
Ø Condensed (Steam model)	BSP	1/2"	1/2"
Ø Air inlet	mm	12	12
<b>DIMENSIONS / PACKAGING DIMENSIONS</b>			
Width / Width	mm	3.718 / 3.800	4.418 / 4.500
Depth / Depth	mm	2.209 / 2.300	2.209 / 2.300
Height / Height	mm	1.810 / 2.060	1.810 / 2.060
Weight / Weight	Kg	2.686 / 3.050	3.080 / 3.680
Volume	m3	14,87 / 18,00	17,66 / 21,32
<b>OTHERS</b>			
No. Fume outlet	Nº	2	2
Ø Fume outlet	mm	120	120
Air flow	m3/h	2 x 1.000	2 x 1.000
Air Consumption (6,5 Bar)	Nl/h	15.000	15.000
Sound Level	dB	70	70

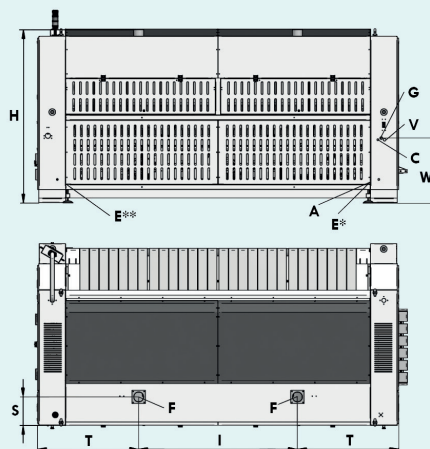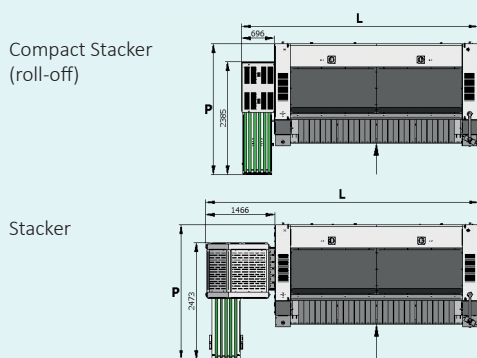

- A. Compressed air inlet
- C. Condensation discharge (steam heating)
- E. Electrical connection
- F. Fumes discharge connection
- G. Gas inlet (gas heating)
- V. Steam inlet (steam heating)

- \* Linen right exit
- \*\* Linen left exit

	L	P	L	P
CTP-260/60	4.309	2.774	5.070	2.863
CTP-330/60	5.009	2.774	5.770	2.863

	H	I	T	S	A	C	E	F	G	V	W
CTP-260/60	1.867	1.196	1.208	478	Ø 12	1/2"	5G4	Ø 120	1"	1"	765
CTP-330/60	1.867	1.896	1.208	478	Ø 12	1/2"	5G4	Ø 120	1"	1"	765

