


| TECHNICAL DATA | UNIT. | DS-11 STANDARD | DS-17 STANDARD | | |
|---|--------------|-------------------|--------------------|-------------------|--------------------|
| CAPACITY | | | | | |
| Capacity 1/18 | Kg | 12 | 18 | | |
| Capacity 1/20 | Kg | 11 | 17 | | |
| Hourly Output STANDARD | Kg/h | 21 | 33 | | |
| Evaporation capacity STANDARD | l/h | 10,9 | 17,2 | | |
| DRUM | | | | | |
| Ø Drum | mm | 750 | 750 | | |
| Ø Door | mm | 574 | 574 | | |
| Door center height | mm | 976 | 976 | | |
| Load hole bottom height | mm | 689 | 689 | | |
| Drum length | mm | 475 | 746 | | |
| Drum volume | l | 210 | 330 | | |
| POWER | | | | | |
| Drum motor power | Kw | 0,25 | 0,25 | | |
| Fan Motor Power STANDARD | Kw | 0,25 | 0,25 | | |
| Total Installed power STANDARD | Kw | 12,55 | 18,55 | | |
| Electric Heating (Installed power) | Kw | 12 | 18 | | |
| Gas heating (installed Power) in KW | Kw | 20,51 | 20,51 | | |
| Gas heating (installed el. power) STANDARD | Kw | 0,55 | 0,55 | | |
| Steam heating (Steam Power KW) | Kw | 30 | 30 | | |
| Steam heating (installed el. power) STANDARD | Kw | 0,55 | 0,55 | | |
| CONNECTIONS | | ELECTRICAL | STEAM / GAS | ELECTRICAL | STEAM / GAS |
| Tension 230V- I + T | Nº x mm2 / A | 3 x 35 / 63A | 3 x 1,5 / 20A | - | 3 x 1,5 / 20A |
| Tension 230V- III + T | Nº x mm2 / A | 4 x 10 / 40A | 4 x 1,5 / 20A | 4 x 16 / 63A | 4 x 1,5 / 20A |
| Tension 400V- III + N + T | Nº x mm2 / A | 5 x 4 / 25A | 5 x 1,5 / 20A | 5 x 10 / 32A | 5 x 1,5 / 20A |
| Ø Gas inlet | BSP | | 1/2" | | 1/2" |
| Ø Steam inlet | BSP | | 3/4" | | 3/4" |
| Ø Condensed (Steam models) | BSP | | 3/4" | | 3/4" |
| DIMENSIONS / PACKING DIMENSIONS | | | | | |
| Width / Width | mm | 785 / 865 | | 785 / 865 | |
| Depth / Depth | mm | 840 / 940 | | 1110 / 1210 | |
| Height / Height | mm | 1694 / 1840 | | 1694 / 1840 | |
| Height without heating battery | mm | - | | - | |
| Net weight / Gross weight | Kg | 172 / 180 | | 187 / 200 | |
| OTHERS | | | | | |
| Max airflow STANDARD | m3/h | 850 | | 850 | |
| Ø Fume exhaust | mm | 200 | | 200 | |
| Sound level STANDARD | dB | 64 | | 64 | |

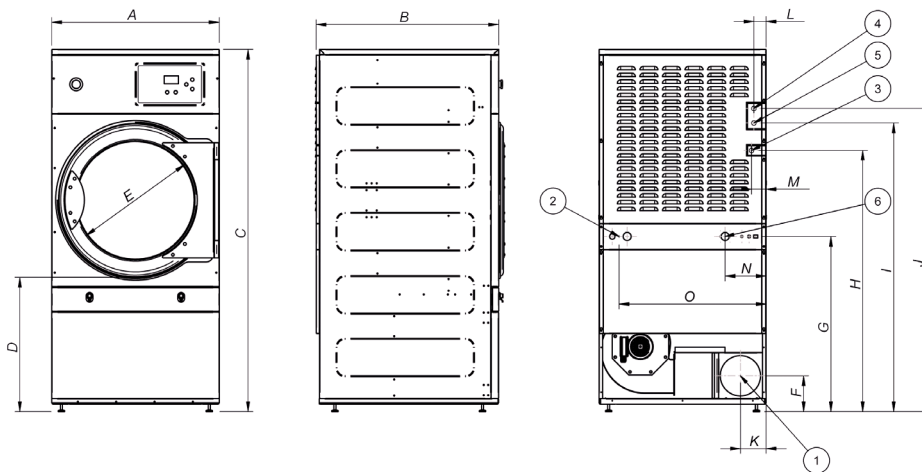

01. Fumes outlet
02. Electrical connection
03. Gas connection
04. Steam connection
05. Condensation outlet
06. Anti fire water valve

| | A | B | C | D | E | F | G | H | I | J | K | L | M | N | O |
|-------|-----|------|------|-----|-----|-----|-----|------|------|------|-----|----|----|-----|-----|
| DS-11 | 785 | 840 | 1700 | 618 | 574 | 168 | 821 | 1226 | 1354 | 1422 | 121 | 56 | 68 | 192 | 690 |
| DS-17 | 785 | 1010 | 1700 | 618 | 574 | 168 | 821 | 1226 | 1354 | 1422 | 121 | 56 | 68 | 192 | 690 |