


TECHNICAL DATA	UNIT.	DS-28 STANDARD	DS-35 STANDARD		
CAPACITY					
Capacity 1/18	Kg	31	37		
Capacity 1/20	Kg	27	33		
Hourly Output STANDARD	Kg/h	55	66		
Evaporation capacity STANDARD	l/h	28,6	34,3		
DRUM					
Ø Drum	mm	947	947		
Ø Door	mm	802	802		
Door center height	mm	1040	1040		
Load hole bottom height	mm	640	640		
Drum length	mm	780	936		
Drum volume	l	550	660		
POWER					
Drum motor power	Kw	0,55	0,55		
Fan Motor Power STANDARD	Kw	0,55	0,55		
Total Installed power STANDARD	Kw	31,15	37,15		
Electric Heating (Installed power)	Kw	30	36		
Gas heating (installed Power) in KW	Kw	41	41		
Gas heating (installed el. power) STANDARD	Kw	1,15	1,15		
Steam heating (Steam Power KW)	Kw	50,1	50,1		
Steam heating (installed el. power) STANDARD	Kw	1,15	1,15		
CONNECTIONS		ELECTRICAL	STEAM / GAS	ELECTRICAL	STEAM / GAS
Tension 230V- I + T	Nº x mm2 / A	-	3 x 1,5 / 20A	-	3 x 1,5 / 20A
Tension 230V- III + T	Nº x mm2 / A	4 x 35 / 100A	4 x 1,5 / 20A	4 x 50 / 125A	4 x 1,5 / 20A
Tension 400V- III + N + T	Nº x mm2 / A	5 x 16 / 63A	5 x 1,5 / 20A	5 x 16 / 63A	5 x 1,5 / 20A
Ø Gas inlet	BSP	1/2"		1/2"	
Ø Steam inlet	BSP	1"		1"	
Ø Condensed (Steam models)	BSP	1"		1"	
DIMENSIONS / PACKING DIMENSIONS					
Width / Width	mm	985/1065		985/1065	
Depth / Depth	mm	1054/1154		1210/1310	
Height / Height	mm	1946/2080		1946/2080	
Height without heating battery	mm	-		-	
Net weight / Gross weight	Kg	230/260		260/285	
OTHERS					
Max airflow STANDARD	m3/h	1200		1200	
Ø Fume exhaust	mm	200		200	
Sound level STANDARD	dB	65		65	

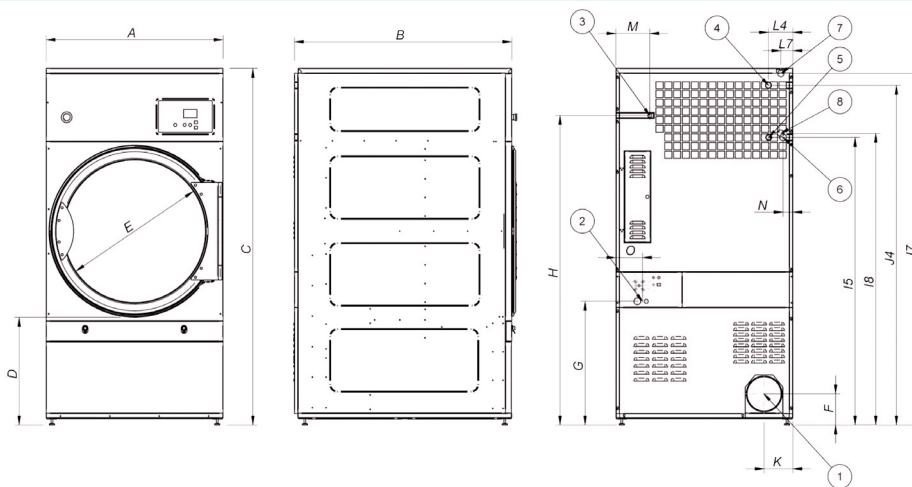

01. Fumes outlet
02. Electrical connection
03. Gas connection
04. Steam connection galva battery
05. Condensation outlet galva battery
06. Anti fire water valve
07. Steam connection stainless battery
08. Condensation outlet stainless battery

	A	B	C	D	E	F	G	H	I5	I8	J4	J7	K	L4	L7	M	N	O
DS-28	985	1054	1946	577	802	172	685	1715	1594	-	1883	-	160	134	-	188	55	148
DS-35	985	1210	1946	577	802	172	685	1715	1594	1616	1883	1948	160	134	67	188	55	690