


TECHNICAL DATA	UNIT.	DSD-11 PM		DSD-17 PM		
<b>CAPACITY</b>						
Capacity 1/18	Kg	23		37		
Capacity 1/20	Kg	22		34		
Hourly Output	Kg/h	-/34		-/53		
Evaporation capacity	l/h	-/17,5		-/27,4		
<b>DRUM</b>						
Ø Drum	mm	750		750		
Ø Door	mm	574		574		
Door center height	mm	547/1522		547/1522		
Load hole bottom height	mm	260/1235		260/1235		
Drum length	mm	475		746		
Drum volume	l	210		330		
<b>POWER</b>						
Drum motor power	Kw	0,25*2		0,25*2		
Fan Motor Power	Kw	-/ 0,25*2		-/ 0,25*2		
Total Installed power	Kw	-/25,1		-/25,1		
Electric Heating (Installed power)	Kw	12x2		12x2		
Gas heating (installed Power) in KW	Kw	12x2		12x2		
Gas heating (installed el. power)	Kw	-/1,1		-/1,1		
<b>CONNECTIONS</b>			<b>ELECTRICAL</b>	<b>GAS</b>	<b>ELECTRICAL</b>	<b>GAS</b>
Tension 230V- I + T	Nº x mm2 / A	-	-	3 x 1,5 / 20A	-	3 x 1,5 / 20A
Tension 230V- III + T	Nº x mm2 / A	4 x 25 / 80A	4 x 25 / 80A	4 x 1,5 / 20A	4 x 25 / 80A	4 x 1,5 / 20A
Tension 400V- III + N + T	Nº x mm2 / A	5 x 10 / 40A	5 x 10 / 40A	5 x 1,5 / 20A	5 x 10 / 40A	5 x 1,5 / 20A
<b>DIMENSIONS / PACKING DIMENSIONS</b>						
Width / Width	mm	785/865		785/865		
Depth / Depth	mm	955/1055		1225/1325		
Height / Height	mm	1980/2126		1980/2126		
Net weight / Gross weight	Kg	260/268		290/303		
<b>OTHERS</b>						
Max airflow	m3/h	-/500*2		-/500*2		
Ø Fume exhaust	mm	200		200		
Sound level	dB	64		64		



- 1A. Fumes outlet (rear option)
- 1B. Fumes outlet (upper option)
- 02. Electrical connection
- 03. Gas connection
- 04. Anti fire water valves

	A	B	C	D1	D2	E	F	G	H	I	J	K	L1	L2	M
DSD-11	785	955	1980	189	1164	574	111	1031	1686	135	135	721	63	133	105
DSD-17	785	1225	1980	189	1164	574	111	1031	1686	135	135	721	63	133	105

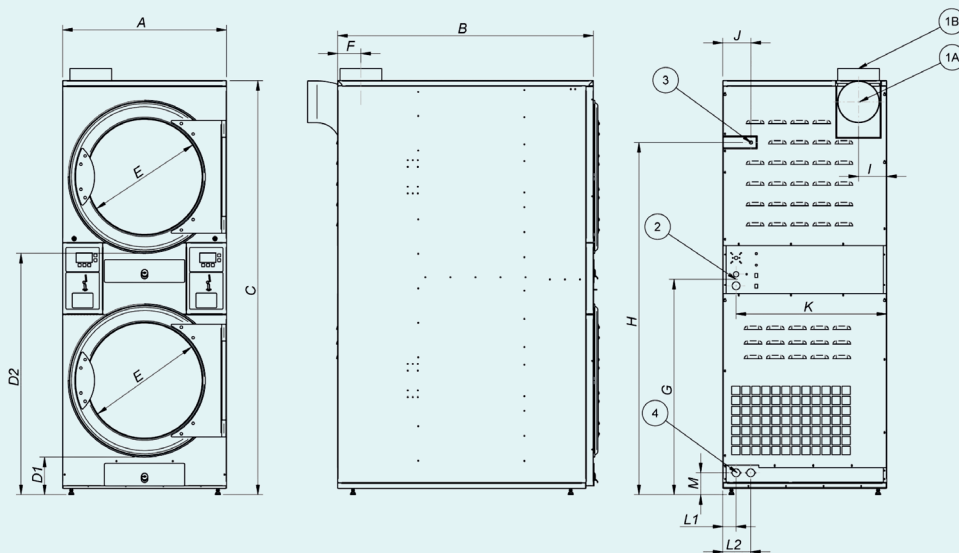