


| TECHNICAL DATA | UNIT. | LS-45 T | LS-62 T | LS-125 T | | | | |
|----------------------------------------|---------------------|-------------------|------------------|---------------|-------------------|------------------|---------------|--------------------------|
| DRUM | | | | | | | | |
| Load capacity 1:9 / 1:10 | Kg | 50/45 | 67/60 | 133/120 | | | | |
| Volume | l | 450 | 600 | 1.200 | | | | |
| Diameter | mm | 918 | 1.048 | 1.360 | | | | |
| Depth | mm | 720 | 684 | 840 | | | | |
| GENERAL DETAILS | | | | | | | | |
| Washing speed | r.p.m. | 42,5 | 38 | 34 | | | | |
| Spining speed | r.p.m. | 850 | 760 | 680 | | | | |
| G Factor | - | 350 | 350 | 350 | | | | |
| Maximum force transmitted | KN | 13,5 ±3,5 | 14 ±4,2 | 39 ±5,25 | | | | |
| Frequency-dynamic force | Hz | 14,1 | 12,66 | 11,33 | | | | |
| Sound level | dB | 70 | 70 | 70 | | | | |
| Double drain | - | Opt | Opt | Opt | | | | |
| Weighing System / Tilting System | - | Opt | Opt | Opt | | | | |
| DOOR | | | | | | | | |
| Height center door / Height door | mm | 1.118/756 | 1.118/756 | 1.330/900 | | | | |
| Diameter | mm | 560 | 560 | 700 | | | | |
| POWER | | | | | | | | |
| Motor | kW | 7,5 | 11 | 15 | | | | |
| Heating (Electric model) | kW | 28,8 | 36 | No | | | | |
| Max. power (Electric model) | kW | 31,3 | 40 | No | | | | |
| Max. power (steam and hot water) | kW | 7,5 | 11 | 15 | | | | |
| CONNECTIONS | | | | | | | | |
| | | ELECTRICAL | HOT WATER | STEAM | ELECTRICAL | HOT WATER | STEAM | STEAM / HOT WATER |
| Tension 230V- III + T | Nº x mm2 / A | 3 x 25 / 80A | 3 x 4 / 32A | 3 x 2,5 / 20A | 3 x 25 / 100A | 3 x 6 / 40A | 3 x 4 / 32A | 3 x 10 / 50A |
| Tension 400V- III + N + T | Nº x mm2 / A | 3 x 10 / 50A | 3 x 2,5 / 20A | 3 x 1,5 / 16A | 3 x 16 / 63A | 3 x 4 / 25A | 3 x 2,5 / 20A | 3 x 4 / 32A |
| Steam inlet (Steam mod.) | inch | 3/4" | | 3/4" | | 1-1/4" | | |
| Maximum steam consumption (Steam mod.) | Kg/h | 19 | | 21 | | 26,5 | | |
| Water inlet | inch | 1" | | 1" | | 1-1/2" | | |
| Water main pressure | Kgs/cm ² | 2-4 | | 2-4 | | 2-4 | | |
| Maximum water consumption* | Lit/h | 473 | | 633 | | 1.254 | | |
| Drain | mm/inch | 3" | | 3" | | 4" | | |
| Drainage capacity | Lit/min | 200 | | 200 | | 500 | | |
| DIMENSIONS / PACKING DIMENSIONS | | | | | | | | |
| Width / Width | mm | 1.478/1.540 | | 1.478/1.540 | | 1.836/1.900 | | |
| Depth / Depth | mm | 1.444/1.580 | | 1.444/1.580 | | 1.863/1.940 | | |
| Height / Height | mm | 1.905/1.970 | | 1.905/1.970 | | 2.245/2.290 | | |
| Net weight / Gross weight | kg | 1.350/1.420 | | 1.400/1.520 | | 3.950/4.100 | | |
| Volume | m ³ | 4,79 | | 4,79 | | 8,44 | | |

* Nº2 Program, 100% load

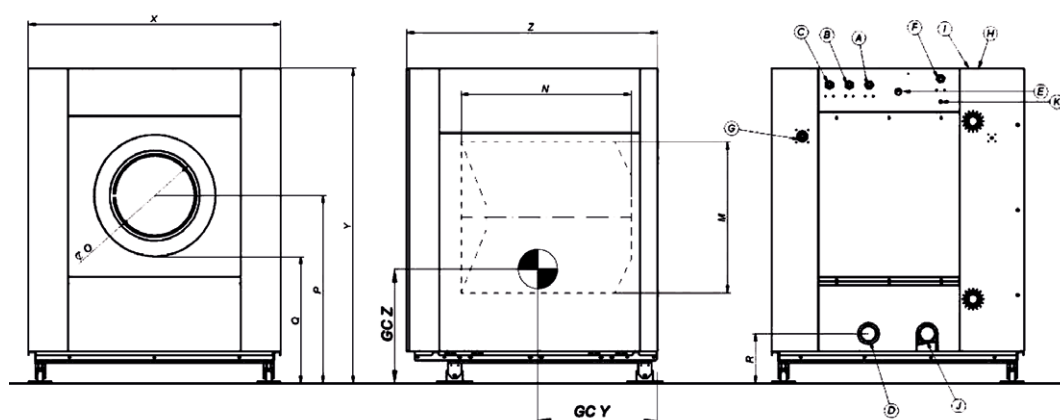

- M. Drum diameter
- N. Drum depth
- O. Entrance diameter
- P. Distance center of the drum
- Q. Distance to the door
- R. Drainage position
- X. Width
- Y. Height
- Z. Depth
- GC Y. Gravity centre
- GC X. Gravity centre

| | M | N | O | P | Q | R | X | Y | Z | GC Y | GC X |
|----------|-------|-----|-----|-------|-----|-----|-------|-------|-------|------|-------|
| LS-45 T | 920 | 720 | 560 | 1.120 | 755 | 100 | 1.480 | 1.905 | 1.445 | 625 | 943 |
| LS-62 T | 1.050 | 685 | 560 | 1.120 | 755 | 350 | 1.480 | 1.905 | 1.445 | 644 | 972 |
| LS-125 T | 1.360 | 840 | 700 | 1.330 | 900 | 350 | 1.840 | 2.245 | 1.865 | 853 | 1.104 |