


TECHNICAL DATA	UNIT.	RS-11 T	RS-14 T	RS-19 T			
DRUM							
Load capacity 1:9 / 1:10	Kg	11/10	14/13	20/18			
Volume	l	100	130	180			
Diameter	mm	620	620	700			
Depth	mm	330	430	470			
GENERAL DETAILS							
Washing speed / Spining speed	r.p.m.	53/536	53/536	50/505			
G Factor	-	100	100	100			
Maximum force transmitted	KN	2,17 ±0,3	2,39 ±0,35	2,81 ±0,45			
Frequency-dynamic force	Hz	8,93	8,93	8,41			
Self-service version	-	Yes	Yes	Yes			
Double drain	-	No	No	Opt			
Option 8mm holes drum	-	Yes	Yes	Yes			
DOOR							
Height center door / Height door	mm	570/310	570/310	655/395			
Diameter	mm	373	373	373			
POWER							
Motor	kW	0,75	1	1,5			
Heating (Electric model)	kW	6	9	12			
Max. power (Electric model)	kW	6,25	9,3	12,5			
Max. power (steam and hot water)	kW	0,75	1	1,5			
CONNECTIONS							
		ELECTRICAL	STEAM / HOT WATER	ELECTRICAL	STEAM / HOT WATER	ELECTRICAL	STEAM / HOT WATER
Tension 230V- I + N + T	Nº x mm2 / A	3 x 4 / 32A	3 x 1,5 / 6A	3 x 10 / 50A	3 x 1,5 / 10A	3 x 16 / 63A	3 x 1,5 / 10A
Tension 230V- III + T	Nº x mm2 / A	3 x 2,5 / 20A	-	3 x 4 / 25A	-	3 x 6 / 40A	-
Tension 400V- III + N + T	Nº x mm2 / A	3 x 1,5 / 10A	-	3 x 1,5 / 16A	-	3 x 2,5 / 20A	-
Steam inlet (Steam mod.)	inch	1/2"		1/2"		1/2"	
Maximum steam consumption (Steam mod.)	Kg/h	7		8,5		12	
Water inlet	inch	3/4"		3/4"		3/4"	
Water main pressure	Kgs/cm ²	2-4		2-4		2-4	
Maximum water consumption*	Lit/h	61,5		78,8		120	
Drain	mm/inch	3"		3"		3"	
Drainage capacity	Lit/min	200		200		200	
DIMENSIONS / PACKING DIMENSIONS							
Width / Width	mm	719/800		719/800		788/860	
Depth / Depth	mm	684/990		830/990		840/1.010	
Height / Height	mm	1.158/1.350		1.158/1.350		1.307/1.500	
Net weight / Gross weight	kg	217/225		239/247		281/301	
Volume	m ³	1,07		1,07		1,30	

* Nº20 Program, 75% load

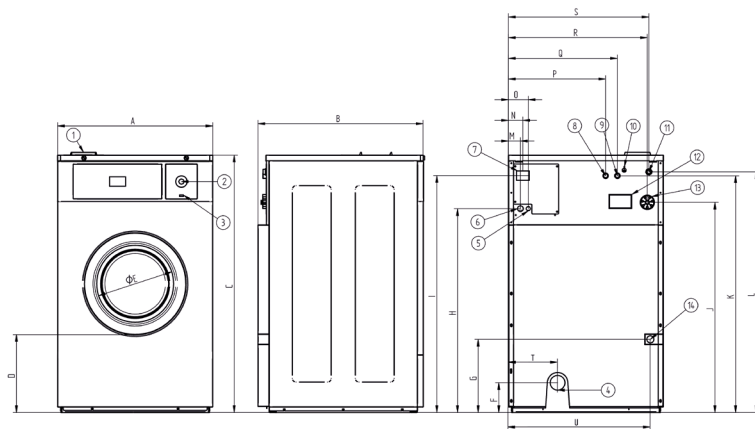

01. Soap dispenser
02. Emergency stop
03. Usb port
04. Drain
05. Electric connection to liquid soap pumps
06. Electrical connection
07. Main switch
08. Auxiliar water inlet
09. Hot water inlet
10. Ground connection
11. Cold water inlet
12. Blur output / water overload
13. Liquid soap connection
14. Steam connection

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U
RS-11 T	719	684	1.158	310	373	144	440	886	1.055	940	1.053	1.073	61	74	101	440	495	637	650	211	654
RS-14 T	719	830	1.158	310	373	144	440	886	1.055	940	1.053	1.073	61	74	101	440	495	637	650	211	654
RS-19 T	788	840	1.307	395	373	150	371	1.035	1.203	1.067	1.202	1.222	61	74	101	494	554	706	714	248	718