


TECHNICAL DATA	UNIT.	PS-100/25	PS-120/25	PS-140/25
<b>TECHNICAL DATA</b>				
Theoretical production 20-25 % humidity	Kg/h	30	35	40
Ø Roll	mm	250	250	250
Working width	mm	1000	1200	1400
Working speed	mt/min	4,2	4,2	4,2
Electronic Control	-	Yes	Yes	Yes
Bed lifting	-	Auto	Auto	Auto
<b>POWER</b>				
Heating Power	Kw	4,95	6	7
Roller Motor Power	Kw	0,18	0,18	0,18
Total electric Power	Kw	5,13	6,18	7,18
Tension	V	400V III 50Hz (option 230V I)	400V III 50Hz (option 230V I)	400V III 50Hz (option 230V I)
<b>DIMENSIONS</b>				
Width	mm	1400	1600	1800
Depth	mm	445	445	445
Height	mm	1005	1005	1005
Weight	Kg	89	101	108
Volume	m3	0,63	0,72	0,81
<b>PACKING DIMENSIONS</b>				
Width	mm	1450	1650	1900
Depth	mm	450	450	500
Height	mm	1140	1140	1140
Weight	Kg	107	116	126
Volume	m3	0,74	0,85	1,08
<b>OTHERS</b>				
Noise Level	dB	55	55	55

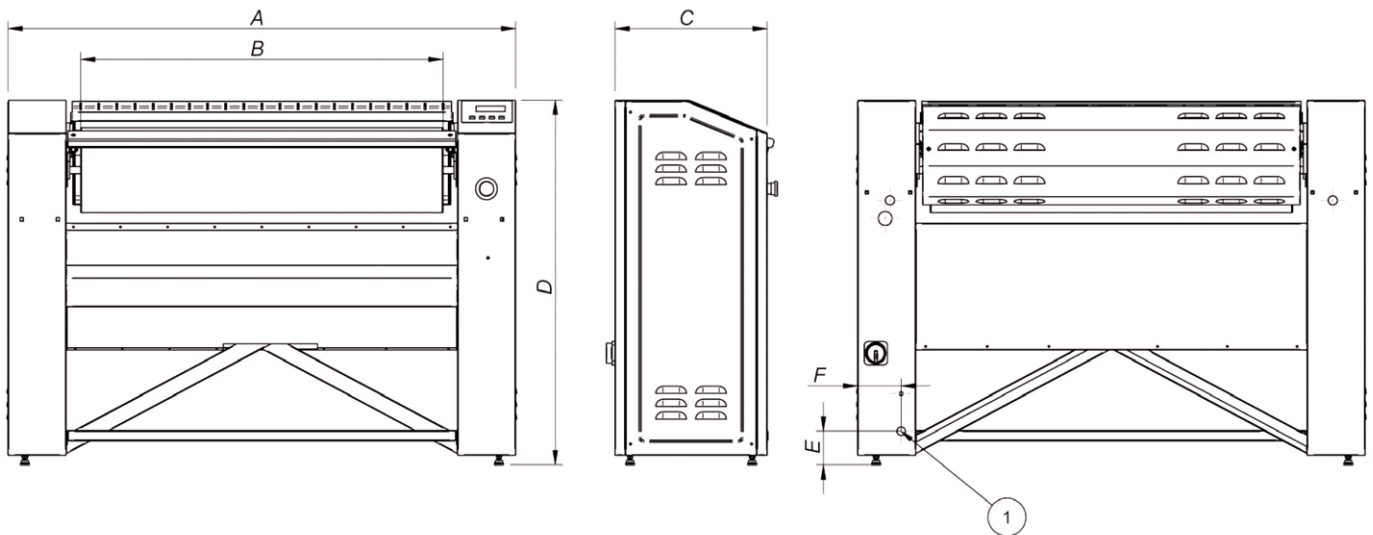

	MODEL	A	B	C	D	E	F
ELECTRICAL CONNECTION	PS-100	1400	1000	435	1005	93	120
	PS-120	1600	1200	435	1005	93	120
	PS-140	1800	1400	435	1005	93	120