

Rated **Excellent**



★ Trustpilot



400+
Reviews
★★★★★

LS-35

WASHING MACHINE

SMART. RELIABLE. ENERGY EFFICIENT.



EFFICIENT

Low water & energy consumption



BUILT TO LAST

Durable, reliable & trusted since 1922



SMART SAVINGS

Fully programmable & free remote support



HIGH G-FORCE

Best water extraction on the market reducing drying times




USER FRIENDLY

Large door opening and easy maintenance



CUSTOMISED

Extra features and special options available upon request

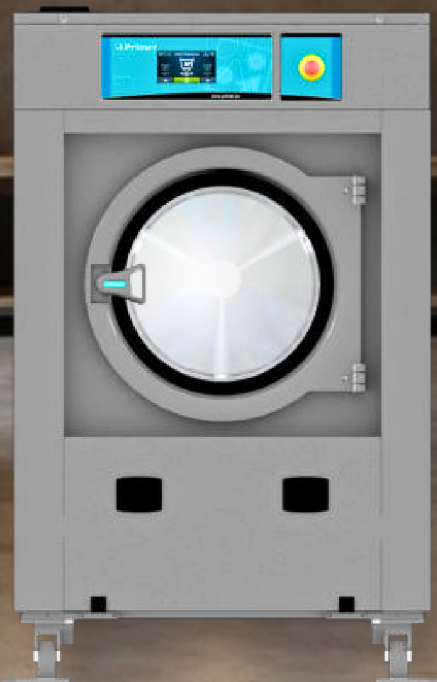

“

THE MACHINES ARE QUICKER, QUIETER AND HAVE ALREADY PAID FOR THEMSELVES IN ENERGY SAVINGS. **THANK YOU MAG!**

”



MAG
LAUNDRY EQUIPMENT
MACHINERY • AFTERCARE • GROWTH



01422 244 733

On average our machines cost 60% less to run each cycle. Business can save more than £15,000 in energy consumption per machine.

Contact **MAG** for more details and your free energy saving forecast!






HCG CFPP 01-04

Please note: Any specifications, images, and technical information provided are believed to be accurate at the time of publication but may be subject to change. We accept no liability for any errors or omissions. Please contact us for the latest specifications and details.

TECHNICAL DATA	UNIT.	LS-35C T2	
DRUM			
Load capacity 1:9 / 1:10	Kg	39/35	
Volume	l	350	
	gal	92,4	
Diameter	mm	860	
	inch	33,8	
Depth	mm	602	
	inch	23,7	
GENERAL DATA			
Washing speed / Spin speed	r.p.m.	42,5/966	
G factor	-	450	
Maximum transmitted force	KN	7,36 ±2,45	
Dynamic force frequency	Hz	14,3	
Sound level	dB	< 70	
Self-service version	-	YES	
Double drain	-	OPT.	
Weighing system / Tilting system	-	OPT./NO	
Sluice / Medical / Thermal Disinfection	-	YES - UPON REQUEST	
DOOR			
Door centre height / Door base height	mm	1000 / 640	
	inch	34,8"/21,2"	
Diameter	mm	560	
	inch	22"	
POWER			
Motor	kW	6	
Electric heating (electric model)	kW	21	
Maximum electric power	kW	22	
Max. power steam & hot water model	kW	6	
CONNECTIONS			
Voltage 110V - 1 + N + E	Nº x mm2 / A	E	HW/S
	Nº x AWG / A	-	-
Voltage 230V - 1 + N + E	Nº x mm2 / A	-	-
	Nº x AWG / A	-	-
Voltage 230V - 3 + E	Nº x mm2 / A	4x16 / 63A	4x4 / 32A
	Nº x AWG / A	4x5 / 80A	4x11 / 30A
Voltage 400V - 3 + N + E	Nº x mm2 / A	5x6 / 40A	5x1,5 / 16A
	Nº x AWG / A	5x9 / 45A	5x15 / 15A
Steam inlet (steam model)	inch	3/4"	
Max. steam consumption (steam model)	Kg/h	18	
Water inlet	inch	3/4"	
Water pressure	Kgs/cm2	2-4	
Max. water consumption*	Lit/h	261,3*	
	GPH	69*	
Drain	mm/inch	3"	
Drain capacity	Lit/min	200	
	GPM	52,8	
DIMENSIONS / PACKED DIMENSIONS			
Net width / Gross width	mm	1.095 / 1.205	
	inch	43,1"/47,4"	
Net depth / Gross depth	mm	1.184 / 1.330	
	inch	46,6"/52,3"	
Net height / Gross height	mm	1.730/ 1.850	
	inch	68,1"/72,8"	
Net weight / Gross weight	kg	735 / 786	
	lb	1620,4/1732,8	
Packing volume	m3	2,7	
	ft3	95,3	

Programme no.20, 75% load
 **Programme no.2, 100% load
 *** 400V version = 48kW / 230V = 36kW

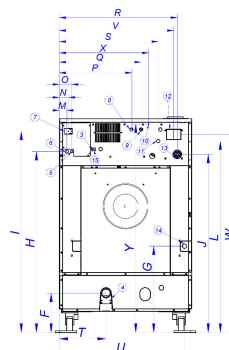

1. Soap dispenser
2. Emergency stop
3. USB port
4. Drain
5. Electric connection to liquid soap pumps
6. Electrical connection
7. Main switch
8. Auxiliar water inlet
9. Hot water inlet
10. Equipotential connection
11. Cold water inlet
12. Blur output / Water overload
13. Liquid soap connection
14. Steam connection
15. Ethernet port
16. Clean side light

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	CGY	CGZ
LS-35C mm	1.095	1.304	1.767	640	560	328	712	1500	1668	1501	1683	1587	61	74	101	596	676	976	808	384	1037	946	1637	740	1723	795	732
inch	43.11	51.34	69.57	25.2	22.05	12.91	28.03	59.06	65.67	59.1	66.25	62.48	2.40	2.91	3.98	23.46	26.61	38.43	31.81	15.12	40.83	37.24	64.44	29.13	67.83	71.3	28.9



Rated **Excellent**



★ Trustpilot



400+
Reviews
★★★★★

LS-45

WASHING MACHINE

SMART. RELIABLE. ENERGY EFFICIENT.



EFFICIENT

Low water & energy consumption



BUILT TO LAST

Durable, reliable & trusted since 1922



SMART SAVINGS

Fully programmable & free remote support



HIGH G-FORCE

Best water extraction on the market reducing drying times




USER FRIENDLY

Large door opening and easy maintenance



CUSTOMISED

Extra features and special options available upon request

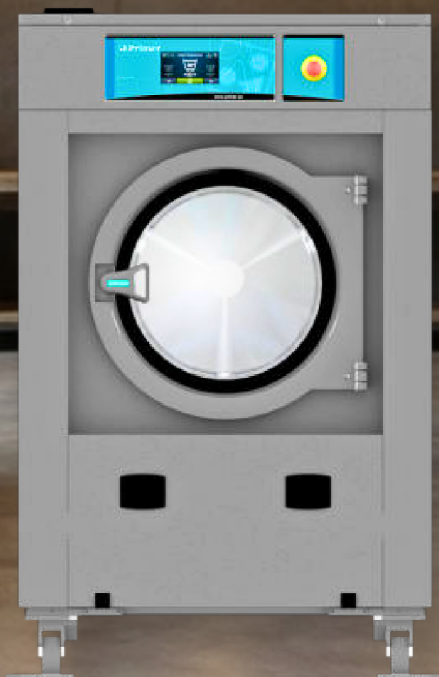

“

THE MACHINES ARE QUICKER, QUIETER AND HAVE ALREADY PAID FOR THEMSELVES IN ENERGY SAVINGS. **THANK YOU MAG!**

”



MAG
LAUNDRY EQUIPMENT
MACHINERY • AFTERCARE • GROWTH



01422 244 733

On average our machines cost 60% less to run each cycle. Business can save more than £15,000 in energy consumption per machine.

Contact **MAG** for more details and your free energy saving forecast!




HCG CFPP 01-04

Please note: Any specifications, images, and technical information provided are believed to be accurate at the time of publication but may be subject to change. We accept no liability for any errors or omissions. Please contact us for the latest specifications and details.

TECHNICAL DATA	UNIT.	LS-45C T2
DRUM		
Load capacity 1:9 / 1:10	Kg	47/42
Volume	l	450
	gal	118,8
Diameter	mm	860
	inch	33,8
Depth	mm	720
	inch	28,3
GENERAL DATA		
Washing speed / Spin speed	r.p.m.	42,5/966
G factor	-	450
Maximum transmitted force	KN	7,36 ±2,45
Dynamic force frequency	Hz	14,3
Sound level	dB	< 70
Self-service version	-	NO
Double drain	-	OPT.
Weighing system / Tilting system	-	OPT.
Sluice / Medical / Thermal Disinfection	-	YES - UPON REQUEST
DOOR		
Door centre height / Door base height	mm	1000 / 640
	inch	34,8"/21,2"
Diameter	mm	560
	inch	22"
POWER		
Motor	kW	6
Electric heating (electric model)	kW	21
Maximum electric power	kW	22
Max. power steam & hot water model	kW	6
CONNECTIONS		
Voltage 110V - 1 + N + E	Nº x mm2 / A	-
	Nº x AWG / A	-
	Nº x mm2 / A	-
Voltage 230V - 1 + N + E	Nº x mm2 / A	-
	Nº x AWG / A	-
	Nº x mm2 / A	-
Voltage 230V - 3 + E	Nº x mm2 / A	4x16 / 63A
	Nº x AWG / A	4x5 / 70A
	Nº x mm2 / A	4x11 / 30A
Voltage 400V - 3 + N + E	Nº x mm2 / A	5x6 / 40A
	Nº x AWG / A	5x9 / 45A
	Nº x mm2 / A	5x15 / 15A
Steam inlet (steam model)	inch	3/4"
Max. steam consumption (steam model)	Kg/h	18
Water inlet	inch	3/4"
Water pressure	Kgs/cm2	2-4
Max. water consumption*	Lit/h	335,9*
	GPH	88,7*
Drain	mm/inch	3"
Drain capacity	Lit/min	200
	GPM	52,8
DIMENSIONS / PACKED DIMENSIONS		
Net width / Gross width	mm	1.095 / 1.205
	inch	43,1"/47,4"
Net depth / Gross depth	mm	1.304 / 1.440
	inch	51,3"/56,69"
Net height / Gross height	mm	1.730/ 1.850
	inch	68,1"/72,8"
Net weight / Gross weight	kg	747/853
	lb	1646,8/1880,5
Packing volume	m3	3,3
	ft3	116,5

Programme no.20, 75% load
 **Programme no.2, 100% load
 *** 400V version = 48kW / 230V = 36kW

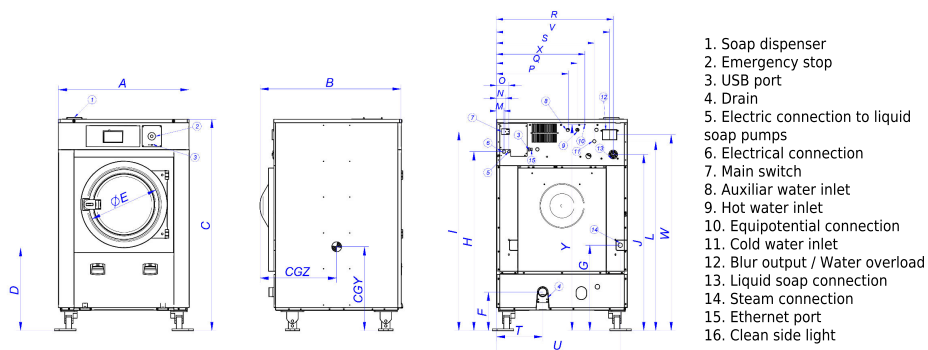

		A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	CGY	CGZ
LS-45C	mm	1.095	1.304	1.767	640	560	328	712	1500	1668	1501	1682	1587	61	74	101	596	676	976	808	384	1027	946	1637	740	1723	795	732
	inch	43.11	51.34	69.57	25.2	22.05	12.91	28.03	59.06	65.67	59.1	66.25	62.48	2.40	2.91	3.98	23.46	26.61	38.43	31.81	15.12	40.83	37.24	64.44	29.13	67.83	71.3	28.9

