


TECHNICAL DATA	UNIT.	RS-26 T	RS-36 T		
DRUM					
Load capacity 1:9 / 1:10	Kg	28/25	39/35		
Volume	l	250	350		
Diameter	mm	770	860		
Depth	mm	530	602		
GENERAL DETAILS					
Washing speed / Spining speed	r.p.m.	48/481	45/455		
G Factor	-	100	100		
Maximum force transmitted	KN	3,4 ±0,6	4,73 ±0,8		
Frequency-dynamic force	Hz	8,01	7,58		
Self-service version	-	Yes	Yes		
Double drain	-	Opt	Opt		
Option 8mm holes drum	-	Yes	Yes		
DOOR					
Height center door / Height door	mm	700/440	735/375		
Diameter	mm	373	560		
POWER					
Motor	kW	2,2	3		
Heating (Electric model)	kW	18	21		
Max. power (Electric model)	kW	18,75	22		
Max. power (steam and hot water)	kW	2,2	3		
CONNECTIONS		ELECTRICAL	STEAM / HOT WATER	ELECTRICAL	STEAM / HOT WATER
Tension 230V- I + N + T	Nº x mm2 / A	3 x 25 / 100A	3 x 1,5 / 16A	3 x 25 / 100A	3 x 1,5 / 16A
Tension 230V- III + T	Nº x mm2 / A	3 x 10 / 50A	-	3 x 16 / 63A	-
Tension 400V- III + N + T	Nº x mm2 / A	3 x 4 / 32A	-	3 x 6 / 40A	-
Steam inlet (Steam mod.)	inch	3/4"		3/4"	
Maximum steam consumption (Steam mod.)	Kg/h	15		18	
Water inlet	inch	3/4"		3/4"	
Water main pressure	Kgs/cm ²	2-4		2-4	
Maximum water consumption*	Lit/h	164,8		199,6	
Drain	mm/inch	3"		3"	
Drainage capacity	Lit/min	200		200	
DIMENSIONS / PACKING DIMENSIONS					
Width / Width	mm	884/930			979/1.050
Depth / Depth	mm	1.011/1.180			1.066/1.250
Height / Height	mm	1.307/1.560			1.411/1.600
Net weight / Gross weight	kg	340/370			473/503
Volume	m ³	1,71			2,10

* N°20 Program, 75% load

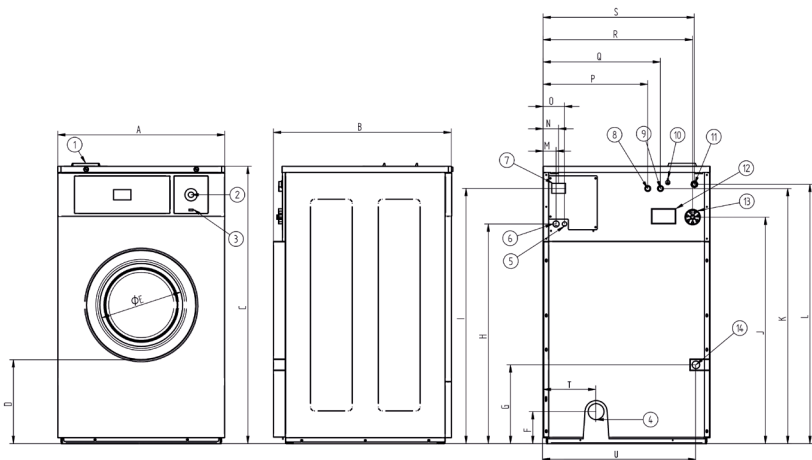

01. Soap dispenser
02. Emergency stop
03. Usb port
04. Drain
05. Electric connection to liquid soap pumps
06. Electrical connection
07. Main switch
08. Auxiliar water inlet
09. Hot water inlet
10. Ground connection
11. Cold water inlet
12. Blur output / water overload
13. Liquid soap connection
14. Steam connection

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U
RS-26 T	884	1.011	1.307	440	373	138	543	1.035	1.203	1.053	1.218	1.218	61	74	101	410	490	769	810	268	820
RS-36 T	979	1.066	1.411	366	560	143	625	1.139	1.307	1.142	1.322	1.322	61	74	101	506	586	864	906	262	917